

Control Unit C-28C-VE C-48-VE



What's C-28C-VE, C-48-VE

These instruments should be combined with O₂ sensor then control cell temperature and convert cell EMF to O₂ value for display and signal output.

Features

- ⊙ Compact DIN size. (96mm×96mm)
- ⊙ Easy to handle.
- ⊙ Readable large display.
- ⊙ Serial communication function (RS232C) is normally equipped.

Specification

		C-28C-VE		C-48-VE	
Dimensions		96W×96H×132D			
Weight		About 500g			
Power		100-240VAC			
Display		Upper	4 figures LED	Upper	5 figures LED
		Lower	4 figures LED	Lower	5 figures LED
Display Ranges		R1 : %	0-99.99、0-100.0、 -19.99-+99.99%	R1	% : 0.00-100.00
		R2 : ppm	0-9999、0-999.9ppm	R2	ppm : 0.0-9999.9
		R3 : mV	-100-1600mV	R3	atm : -35.00-0.00 mV : -575.0-1575.0
Output ※1	DCA	D. C. 4-20mA			
	DCV	D. C. 0 to 1V、0 to 5V、0 to 10V			
Communication		RS232C			
Range Select		Manual／Auto		Manual／Auto／Remote	
Alarm		Output : Hi/Lo、Hi/H・Hi、Lo/L・Lo Failure : Sensor temp. abnormal			
Other functions		Cell EMF and/or Cell temp. are shown on lower display. Range answer-back, hold, one-touch calibration equipped.			


※1 It is possible to set arbitrarily within the range of the above-mentioned.

The range is limited only 0~1500mV at mV range.


※2 For the improvement, the specification and design may be changed without prior notice.

Dimensions

Panel Mount

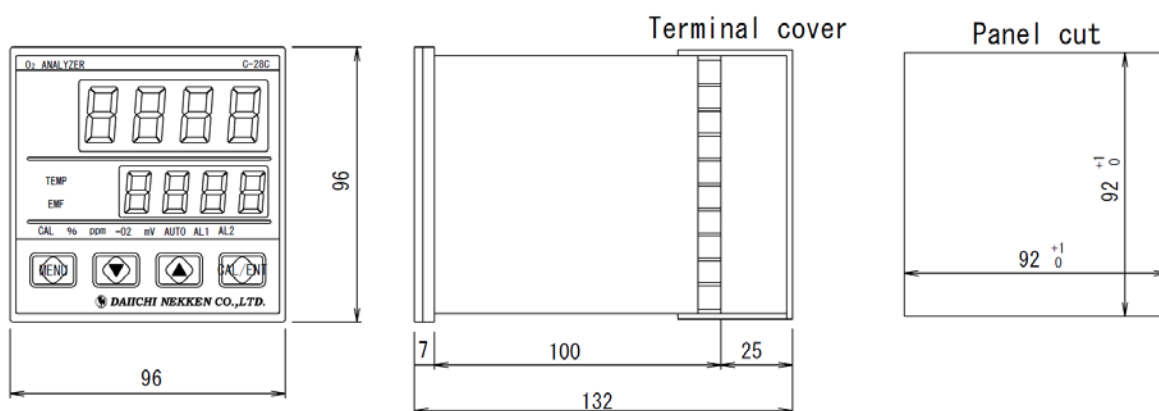

Wall Mount

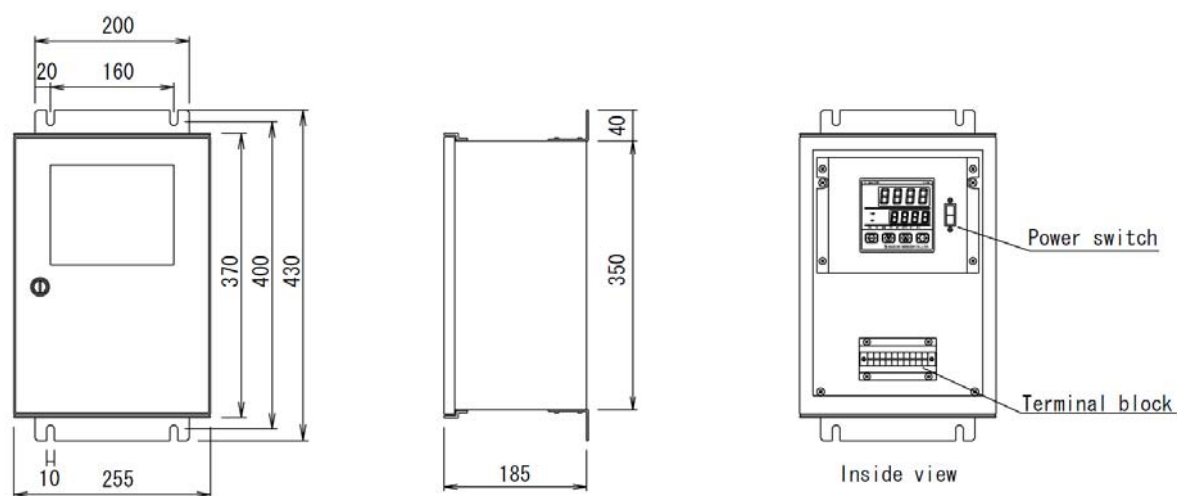

Inquiry

Daiichi Nekken CO., LTD

13-22 Nishikura-Cyo Ashiya-City
Hyogo-Prefecture Japan

TEL 0797-31-2410 / FAX 0797-31-8951

URL <http://www.daiichinekken.co.jp>

E-mail info@daiichinekken.co.jp